

UNCLASSIFIED

AD NUMBER

AD102194

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to U.S. Gov't. agencies and their contractors;
Administrative/Operational Use; MAY 1956. Other requests shall be referred to Office of Naval Research, 875 N. Randolph St., Arlington, VA 22203.

AUTHORITY

ONR ltr 28 Jul 1977

THIS PAGE IS UNCLASSIFIED

UNCLASSIFIED

AD NUMBER

AD102194

CLASSIFICATION CHANGES

TO:

UNCLASSIFIED

FROM:

CONFIDENTIAL

AUTHORITY

ONR ltr 28 Jul 1977

THIS PAGE IS UNCLASSIFIED

THIS REPORT HAS BEEN DELIMITED
AND CLEARED FOR PUBLIC RELEASE
UNDER DOD DIRECTIVE 5200.20 AND
NO RESTRICTIONS ARE IMPOSED UPON
ITS USE AND DISCLOSURE.

DISTRIBUTION STATEMENT A

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED.

AD 102194

Armed Services Technical Information Agency

Reproduced by

DOCUMENT SERVICE CENTER

KNOTT BUILDING, DAYTON, 2, OHIO

This document is the property of the United States Government. It is furnished for the duration of the contract and shall be returned when no longer required, or upon recall by ASTIA to the following address: **Armed Services Technical Information Agency, Document Service Center, Knott Building, Dayton 2, Ohio.**

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

**NOTICE: THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE
NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING
OF THE ESPIONAGE LAWS, TITLE 18, U.S.C., SECTIONS 793 and 794.
THE TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN
ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW.**


AD 102/194
102/194

ASTIA FILE COPY

This document has been reviewed in accordance with
OPNAVINST 5510.7, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100. The security
classification assigned here to is correct.

Date: 7/30/56 *W. C. Fortune*
By direction of
Chief of Naval Research (Code *440*)

FC

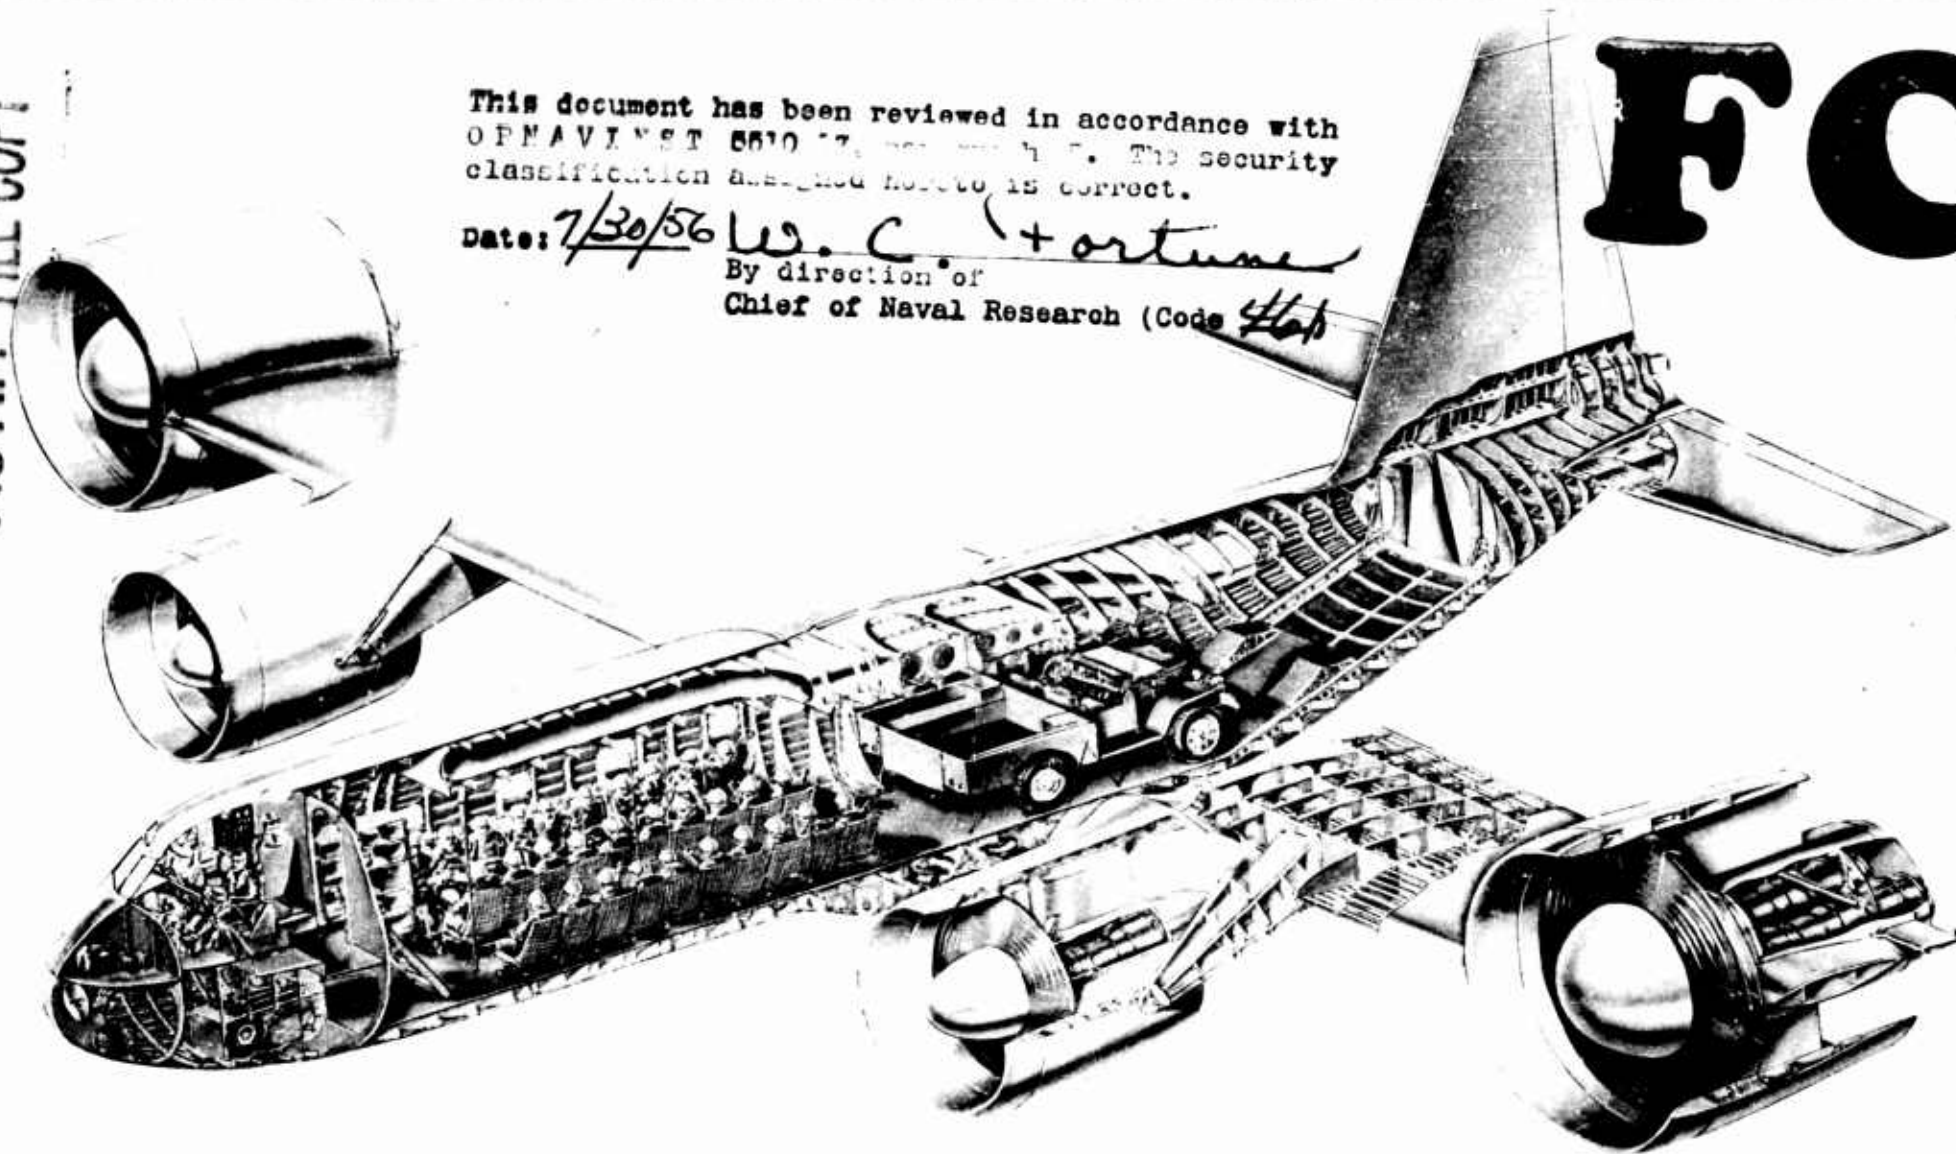

Standard Aircraft Characteristics

MODEL D181

AUG 8 1956

DUCTED PROPELLER ASSAULT TRANSPORT AIRCRAFT

REPORT NO. D181-945-008. 56AA 46311



THE ATTACHED DOCUMENT CONTAINS

CONFIDENTIAL

INFORMATION

AND AS SUCH IT MUST BE

RECORDED—On a Classified Document Register and marked with the assigned Bell Identification Number when you originate, reproduce or receive a classified document. See Bell Aircraft Corporation Security Manual.

STORED—Minimum requirements call for a steel file cabinet equipped with a steel bar and three-position combination dial type padlock.

TRANSMITTED—In double sealed opaque containers. The classified information shall be protected from direct contact with the inner cover by a sheet or by folding inward. Only the inner container shall indicate the classification. Both the inner and outer cover shall indicate the addressee and addressor.

By U.S. registered mail, air or surface, by appropriately cleared messenger designated by the company or by protected commercial express, air or surface, under billing which assures the highest degree of protective handling.

RECEIPTED FOR—Classified Document Receipt, Form G6-32, optional with sender, may be enclosed within the inner wrapper for all **CONFIDENTIAL** matter dispatched outside Bell Aircraft Corporation Niagara Frontier Division facilities.


Hand Receipt, Form G6-42, optional with sender, may be used for all transmittals of CONFIDENTIAL matter between individuals or by company mail service within Bell Aircraft Corporation Niagara Frontier Division facilities.

ADDITIONAL SECURITY INFORMATION


- (1) **Bound documents**—Classified books or pamphlets, the pages of which are permanently and securely bound together so that the pages thereof cannot be removed without damage or mutilation, shall be marked with the classification assigned to the document at the top and bottom on the outside of the front cover and back cover, title, first and last pages and all printed, typed, or written pages which contain classified information, including the reverse side, if used.
- (2) **Correspondence and unbound documents**—Correspondence and other documentary material not permanently and securely bound together shall be marked with the appropriate classification at the top and bottom of each page which contains classified information, including the cover page, if used. The marking shall be placed so that it will not be hidden from view when the pages are clipped or stapled together.
- (3) **Letters of Transmittal**—A letter transmitting defense information shall be marked with a classification at least as high as its highest classified inclosure. Letters of Transmittal, when appropriate, shall indicate that upon removal of classified inclosures such letters will be downgraded or declassified.
- (4) **National Defense Stamp**—Documents containing classified defense information furnished authorized persons other than those of, or in the employ of, agencies of the Department of Defense shall bear a notation substantially as follows.
 "This document contains information affecting the national defense of the United States, within the meaning of the Espionage Laws, Title 18, U.S.C., Sections 793 and 794, the transmission or revelation of which in any manner to an unauthorized person is prohibited by law."

- (5) **"Restricted Data"**—In addition to the markings prescribed above, "Restricted Data" will be marked in capital letters, "Restricted Data—Atomic Energy 1954," not less than 1/4 inch in height.

46311

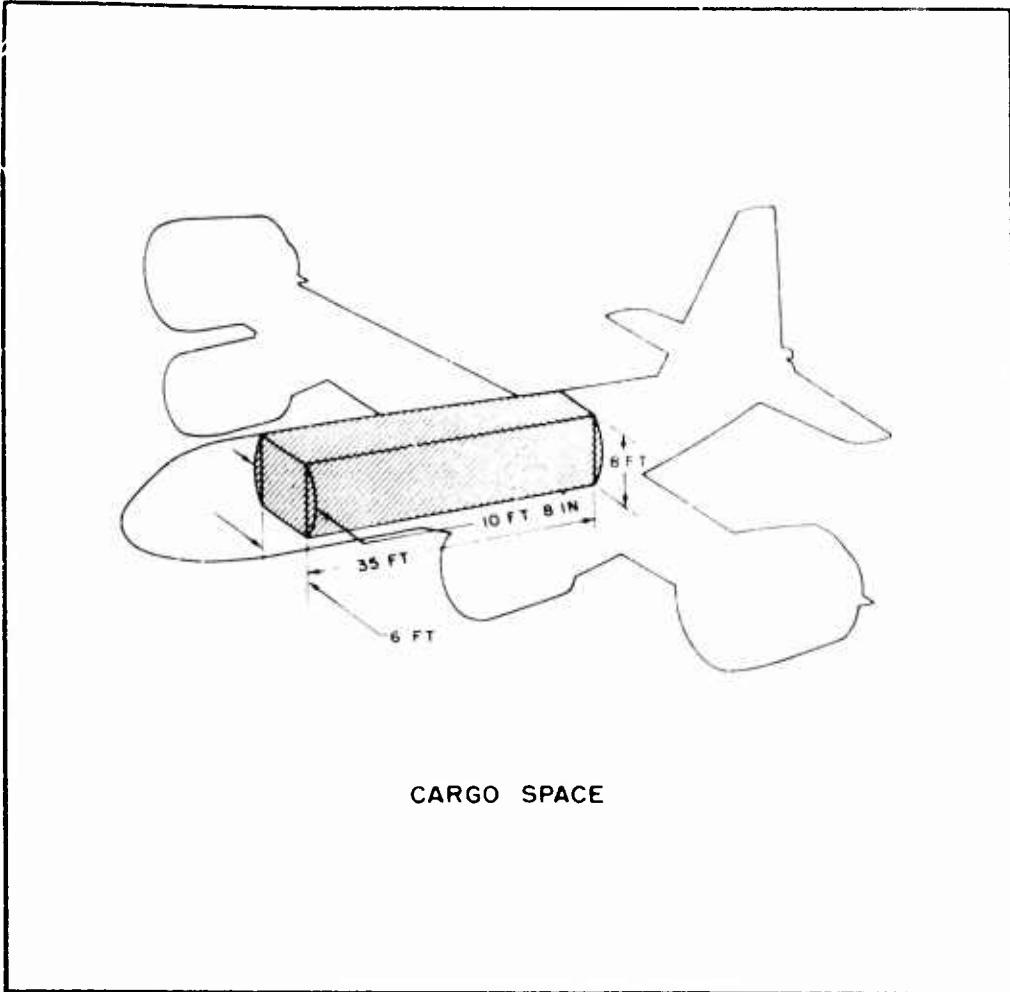


CARGO SPACE

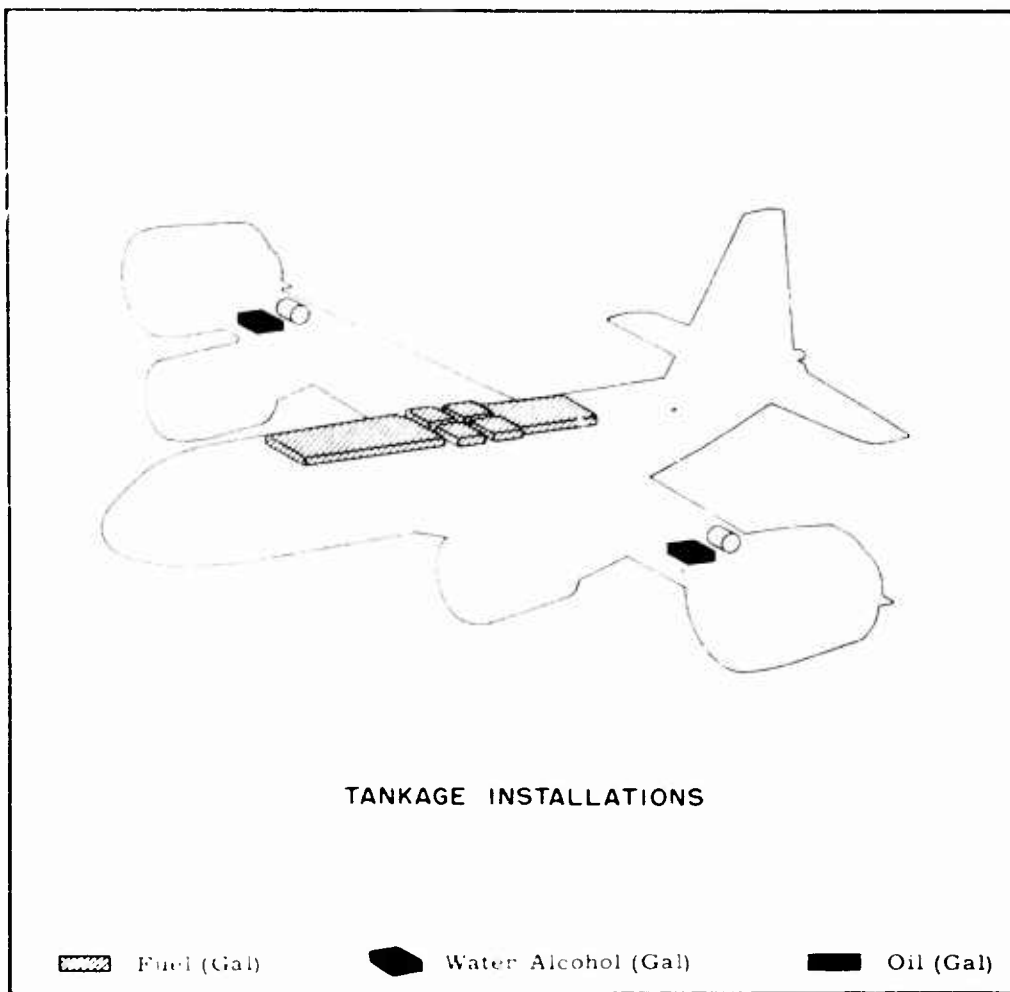

TANKAGE INSTALLATIONS

Fuel (Gal) Water Alcohol (Gal) Oil (Gal)

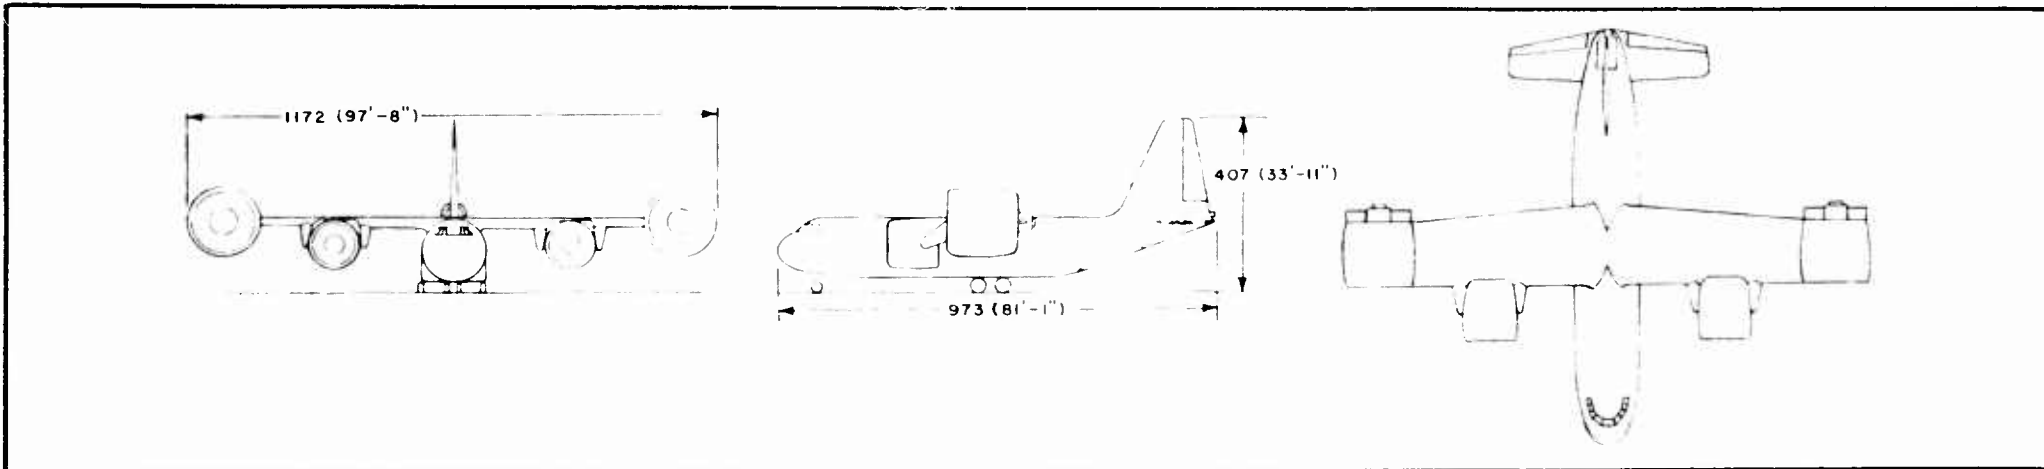

POWER PLANT

Number: MAIN
 Six Turboprop Engines
 AUXILIARY
 (VTOL Pitch and Yaw Control)
 One Turbojet Engine
 Models: MAIN
 Allison 550-B1
 AUXILIARY
 J85
 Manufacturers:
 MAIN
 General Motors Corp.
 AUXILIARY
 General Electric Corp.

ENGINE RATINGS

Static Rating at Sea Level - Maximum
 Main (Shaft HP - total) 31,008 HP
 Jet Thrust 830 lb
 Auxiliary
 (Jet Thrust) 2,450 lb
 Vertical Thrust - VTOL Cond.
 (6000 ft - 95° F) with water injection
 72,100 lb

DIMENSIONS

Length 81 ft 1 in.
 Height 33 ft 11 in.
 Span (over-all) 97 ft 8 in.
 Wing Area
 (neglecting ducts) 1220 sq. ft.
 Wing Aspect Ratio 5.8
 Wing Section NACA 64A412
 Wheel Tread (aft gear) 157 in.
 Wheelbase 366 in.

Mission and Description

DESCRIPTION

The basic mission required a radius of 425 miles at 300 mph with an initial vertical take-off. An 8000 pound payload is carried out and 4000 pounds back. The general flight plan of all missions was quite similar to the basic mission:

1. Take-off at 6000 ft and 95° F - VTO or STO depending on initial loading. All landings and subsequent take-offs are vertical. Payload out is 8000 pounds or greater.
2. Climb to cruise altitude; fly 80% of radius.
3. Descend to sea level; fly remaining 20%.
4. Land vertically at 6000 ft and 95° F; remove payload; reload a 4000-pound payload. NO FUEL IS ADDED.
5. Take-off vertically at 6000 ft and 95° F and return.
6. Fly first 20% at sea level.
7. Climb to cruise altitude for remainder of distance.
8. Descend and land vertically at 6000 ft and 95° F holding a 10% fuel reserve.

MISSIONS WITH ALL VTO

BASIC MISSION

1. Minimum vertical take-off gross weight to accomplish this mission.
2. Minimum cruise altitude to accomplish this mission.
3. Highest allowable velocity at altitude and 300 mph at sea level to accomplish this mission.

BASIC MISSION VARIATIONS

4. High-speed mission: Cruise at 455 mph at altitude and sea level.
5. Maximum VTO Radius with take-off at sea level standard; cruise for maximum radius at 300 mph at sea level and altitude.

MISSION WITH INITIAL STO - all other landings and take-offs are vertical.

1. Maximum radius with 8000-pound payload out.
2. Maximum payload out for 425 miles radius.
3. 450 mph cruise; maximum radius with an 8000-pound payload out.

CARGO CAPACITY

2500 cubic feet
 8000 pounds basic
 16,720 pounds maximum

WEIGHTS

Max. Vertical Take-off 70,000 lb
 @6000 ft and 95° F
 Max. Vertical Landing 70,000 lb
 @ 6000 ft and 95° F
 Weight Empty 43,815 lb

F U E L

Internal
 2308 gal. 6.5 lb/gal 15,000 lb

ELECTRONICS

AN/ARC-34 UHF Radio
 AN/ARC-49 VHF Radio
 AN/APN-22 Radar Altimeter
 AN/ARN-31 Glide Path Rec.
 AN/ARN-21 Nav. Radio
 AN/APX-25 Transponder (IFF)
 AN/ARN-32 Marker Beacon Rec.
 618S-1 HF Radio (provision only)


Loading and Performance - Typical Mission

		ALL VTOL					INITIAL STO, All Other Take-off & Landings Vertical		
		BASIC MISSION			IV High-Speed Cruise 455 mph	V Maximum VTO Radius with S.L. Std. Take-off	A Maximum Radius 8000-lb Payload	B Maximum Payload 425-mile Radius	C High-Speed Cruise 450 mph
		I Minimum Vertical Take-off Gross Wt.	II Minimum Cruising Altitude	III High-Speed Cruise at Altitude and 300 mph at Sea Level					
TAKE-OFF WEIGHT: OUTBOUND	lb	67,380	70,000	70,000	70,000	75,800	86,150	76,890	83,530
Payload	lb	8,000	8,000	8,000	8,000	8,000	8,000	16,720	8,000
Fuel	lb	13,290	15,920	15,920	15,920	21,720	32,060	14,080	29,290
Wing Loading	psf	55.1	57.4	57.4	57.4	62.1	70.5	63.0	68.5
Stall Speed, Power Off	mph	143	146	146	146	158	162	153	159
Take-Off Ground Run at 6000 ft & 95° F	ft	0	0	0	0	0	770	300	660
Rate of Climb at S.L.	fpm	9,440	9,000	9,000	9,000	8,220	7,160	8,110	7,420
Time: S.L. to 20,000 ft	min	2.51	2.63	2.63	2.63	2.89	3.36	2.93	3.24
Time: S.L. to 30,000 ft	min	4.30	4.54	4.54	4.54	5.06	6.02	5.18	5.78
Service Ceiling (100 fpm)	ft	49,900	49,500	49,500	49,500	48,500	46,500	48,200	47,000
FERRY RANGE WITH PAYLOAD	mi	1,120	950	1,360	920	1,710	2,520	1,640	1,750
Average Cruising Speed	mph	320	300	320	455	320	300	300	450
Average Cruising Altitude	ft	30,000	11,300	30,000	30,000	30,000	30,000	30,000	30,000
COMBAT RADIUS: 20% at S.L.	mi	425	425	425	302	705	987	425	607
Average Cruising Speed-Out	mph	300	300	420 †	455	300	300	300	450
*Average Cruising Altitude-Out	ft	24,800	11,300	30,000	30,000	23,900	21,200	23,000	30,000
LANDING WEIGHT - at Radius Point	lb	61,150	62,770	62,700	62,780	65,560	70,000	70,000	70,000
Ground roll at 6000 ft & 95° F	ft	0	0	0	0	0	0	0	0
Total from 50 ft	ft	0	0	0	0	0	0	0	0
**TAKE-OFF WEIGHT: RETURN	lb	56,000	58,620	58,550	58,630	61,410	65,790	57,070	65,790
Payload	lb	4,000	4,000	4,000	4,000	4,000	4,000	4,000	4,000
Stall Speed, Power Off	mph	131	134	134	134	137	142	132	142
Take-Off Ground Run at 6000 ft & 95° F	ft	0	0	0	0	0	0	0	0
Rate of Climb at S.L.	fpm	11,710	11,120	11,120	11,120	10,550	9,740	11,450	9,740
Time: S.L. to 20,000 ft	min	2.02	2.13	2.13	2.13	2.26	2.45	2.08	2.45
Time: S.L. to 30,000 ft	min	3.35	3.52	3.52	3.52	3.80	4.17	3.42	4.17
Service Ceiling (100 fpm)	ft	52,000	50,800	50,800	50,800	51,200	50,300	51,300	50,300
Average Cruising Speed: back	mph	300	300	420 †	455	300	300	300	450
*Average Cruising Alt.: back	ft	29,000	11,300	30,000	30,000	28,400	26,700	26,600	30,000
LANDING WEIGHT: RETURN	lb	51,560	51,820	51,820	51,820	52,590	53,430	51,670	53,182
Ground roll at 6000 ft & 95° F	ft	0	0	0	0	0	0	0	0
Total from 50 ft	ft	0	0	0	0	0	0	0	0
Reserve fuel (10% of total)	lb	1,330	1,590	1,590	1,590	2,170	3,210	1,410	2,930
†† Hovering Time	min	6.24	7.46	7.46	7.46	10.2	15.1	6.61	13.7
†† Best Altitude Loiter	min	53.	64.	64.	64.	87.	128.	56.	117.


NOTES

- *This is the average altitude which does not include the portion flown at sea level.
- **No fuel is added.
- † This velocity at 30,000 feet. Velocity at Sea Level = 300 mph
- †† Available with reserve of 10% initial fuel.


Take-Off

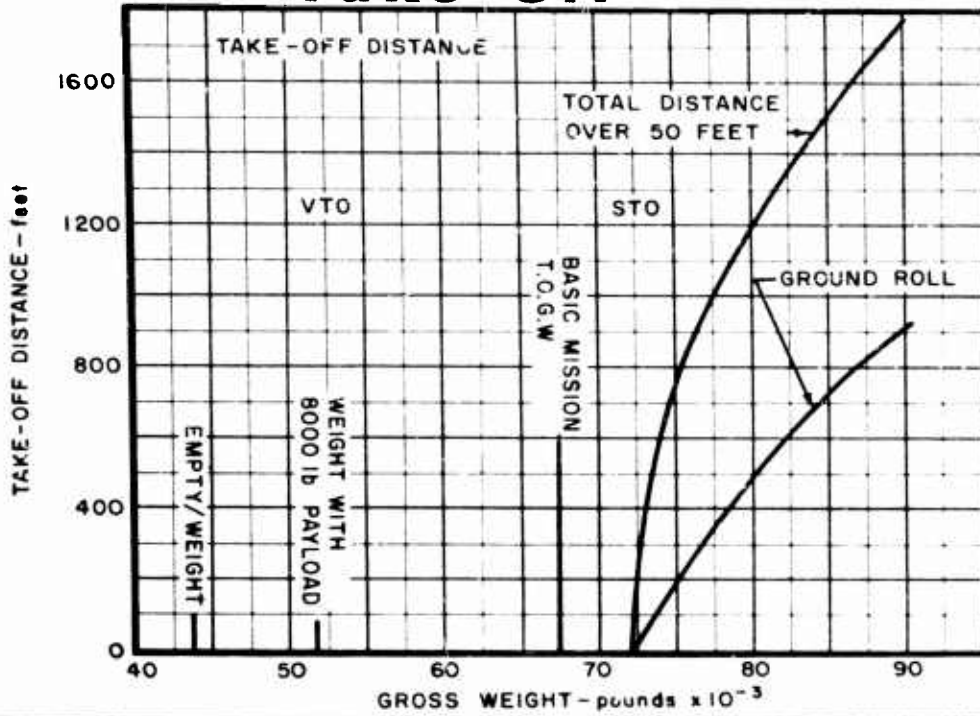


Speed & Rate of Climb

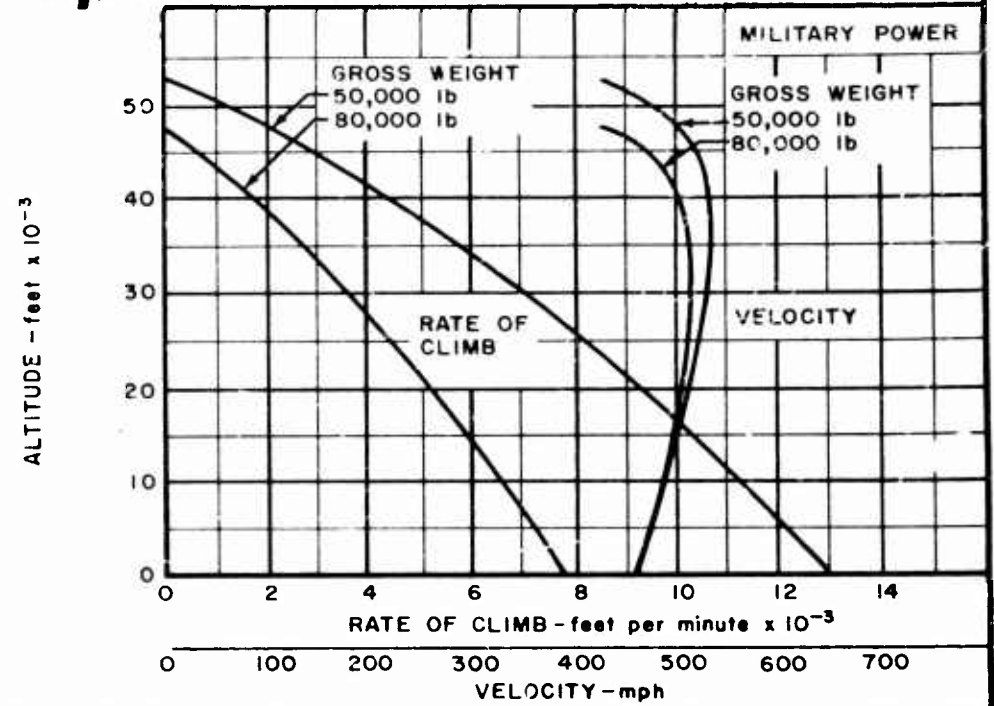

Range vs Velocity

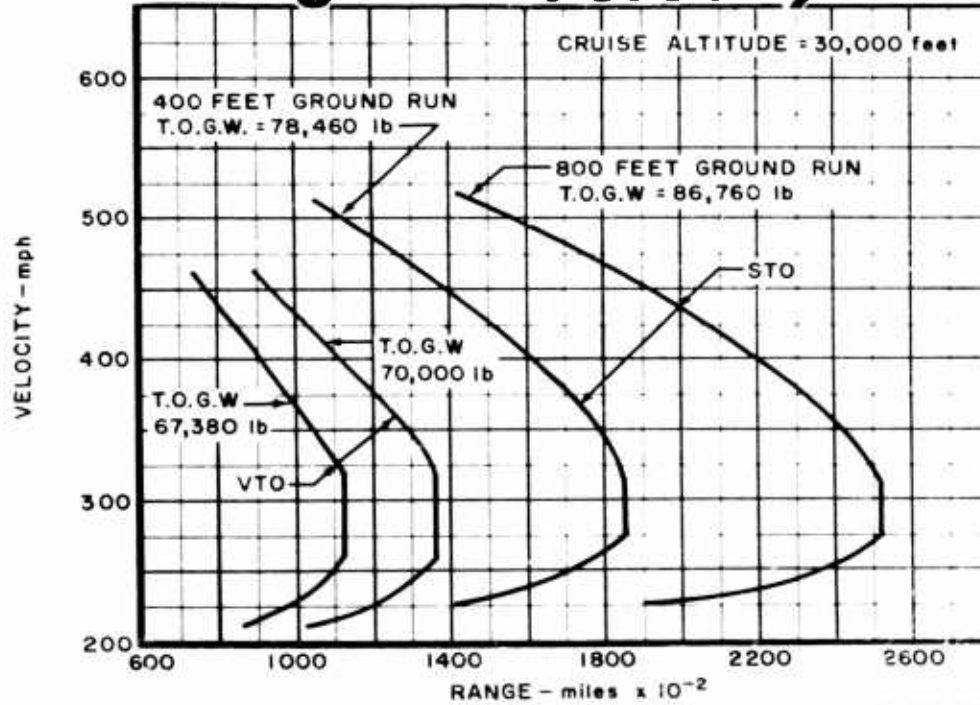


Range vs Hovering Time

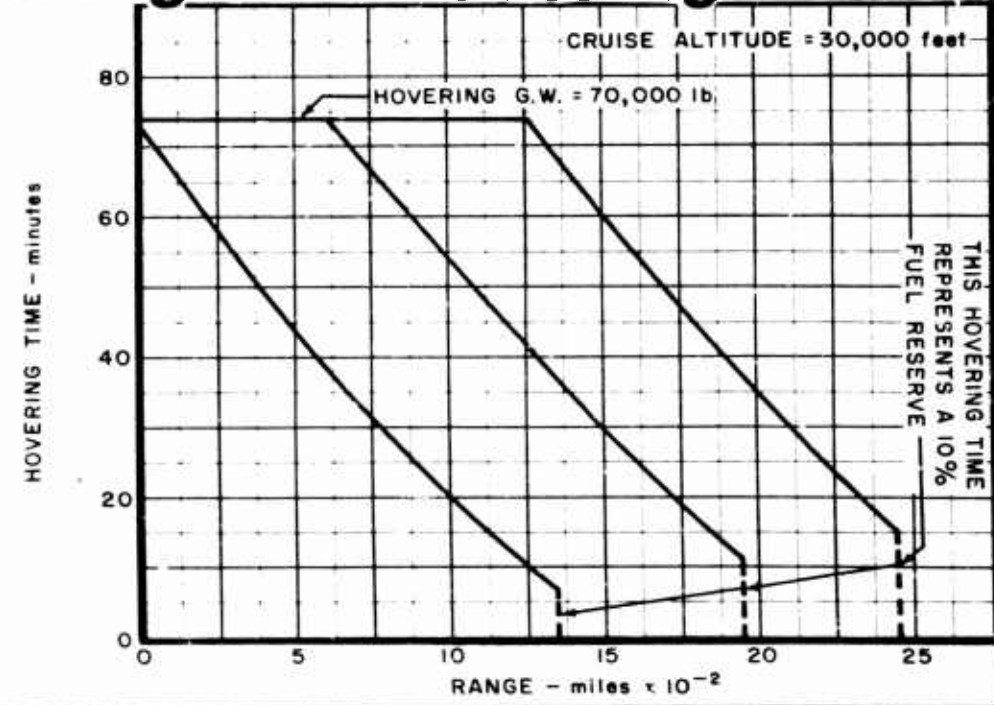

SUPPLEMENTAL


VERTICAL TAKE-OFF FLIGHT PATH


T.O.G.W. = 70,000 LB, T/W = 1.03

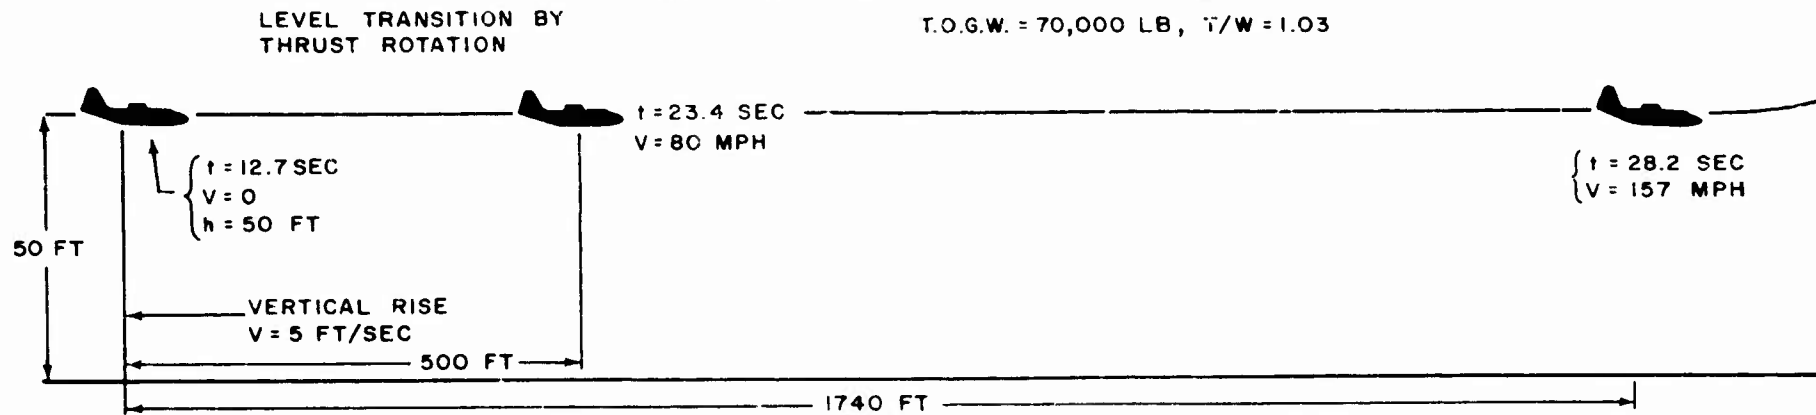

VERTICAL LANDING FLIGHT PATH


G.W. = 50,000 LB

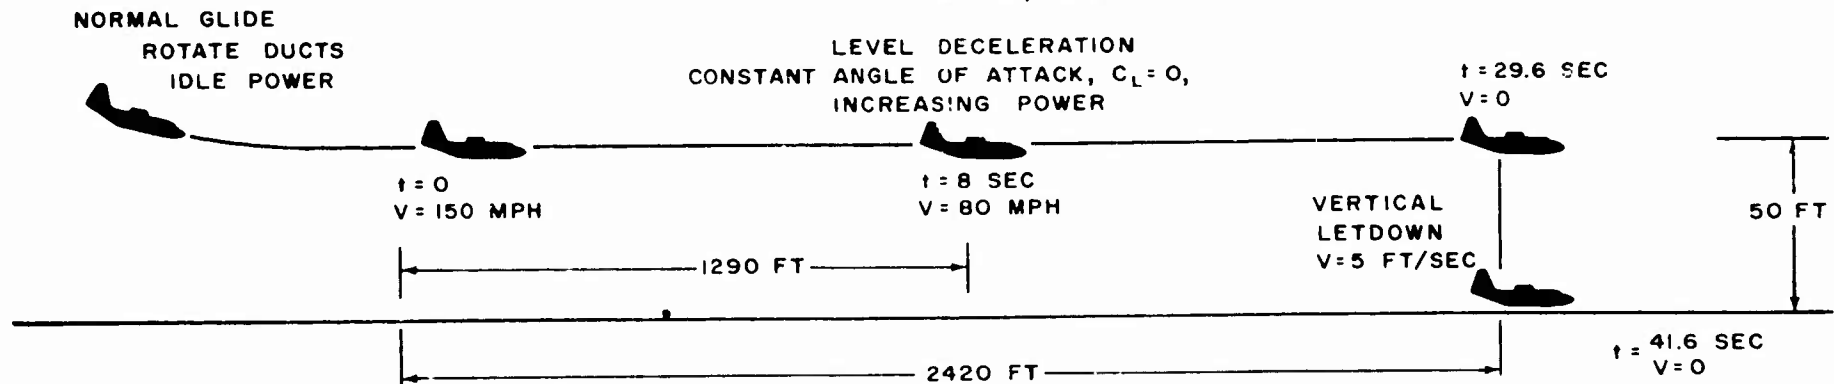

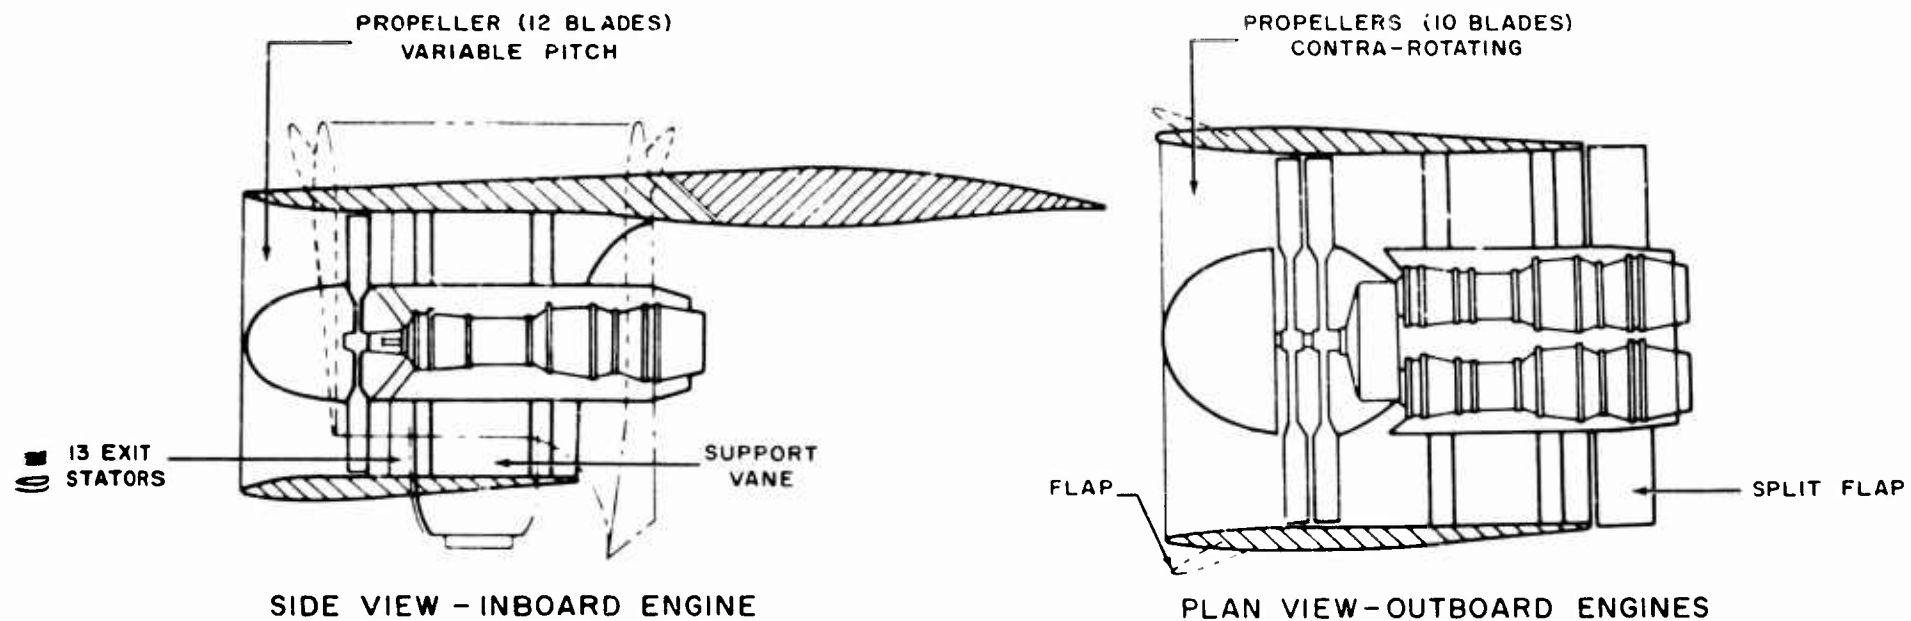N O T E S**GENERAL NOTES**

1. It was not necessary to comply with Specification MIL-C-5011A by verbal agreement with ONR. For presentation purposes the general format of the specification was used and the intent was followed with the following deviations:
 - a. The actual fuel used to take-off and accelerate to climb speed, as determined by a numerical integration was used.
 - b. The reserve used was 10% of the total fuel on board at take-off. No fuel was added during the mission.
2. Alterations in the prescribed format were made to present more satisfactorily the VTOL features of this aircraft.
3. The technical summary report presents complete performance information on this airplane. But due to the nature of the contract, does not contain details of method and sample calculations.

Characteristics Summary Basic Mission

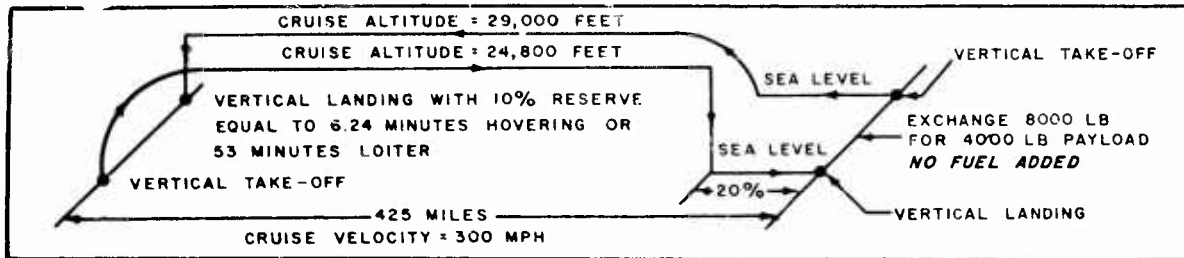




PERFORMANCE		
COMBAT RADIUS	FERRY RANGE	MAXIMUM SPEED
425 miles at 300 mph; 20% at sea level	1120 miles at 320 mph Cruise at 30,000 ft.	520 mph at 35,000 ft.
CLIMB	CEILING	TAKE-OFF
9440 ft per min at sea level, take-off weight, and military power 11,710 ft per min at sea level, radius point take-off weight, and military power	49,900 ft at 100 ft per min, take-off weight, and military power 52,000 ft at 100 ft per min, radius point take-off weight, and military power	No ground run Vertical take-off
	HOVERING ENDURANCE	STALLING SPEED
	Maximum -- 70 min Minimum -- 6.24 min	143 mph at take-off weight 131 mph at radius point take-off weight
LOAD	WEIGHTS	TIME TO CLIMB
Crew (3) 645 lb Oil 328 lb Fuel 13,290 lb Payload 8,000 lb	Initial take-off 67,380 lb Radius point take-off 56,000 lb Maximum VTO at 6000 ft and 95° F with 3% thrust margin 70,000 lb	To 20,000 ft at T.O.G.W. 2.51 min To 30,000 ft at T.O.G.W. 4.30 min To 20,000 ft at radius point G.W. 2.02 min To 30,000 ft at radius point G.W. 3.35 min

NOTES

- Performance Basis: IOCA standard atmosphere no wind, except for take-offs and landings, which were at 6000 ft and 95° F. Fuel consumption corrected for installation and increased 5% per MIL-C-5011A.
- Missions: Vertical take-off and landing at all points.
 - Minimum cruise altitude for basic mission, 11,300 ft.
 - High-speed cruise at altitude and 300 mph at sea level for basic mission. 420 mph at 30,000 ft.
 - High-speed cruise of 455 mph at sea level and 30,000 ft radius = 302 miles.
 - Max. VTO Radius with sea level standard take-off and cruise at 300 mph: R = 705 miles.
- Missions with initial STO: all later take-offs and landings vertical.
 - Max. Radius. Initial Ground Run = 770 ft. Rad = 987 mi.
 - Max. payload with 425-mile radius, initial ground run = 300 ft, payload = 16,720 lb.
 - High-speed radius at 450 mph, Rad = 607 mi., initial ground run = 660 ft.

Characteristics Summary

MODEL D181 Ducted Propeller Assault Transport Aircraft

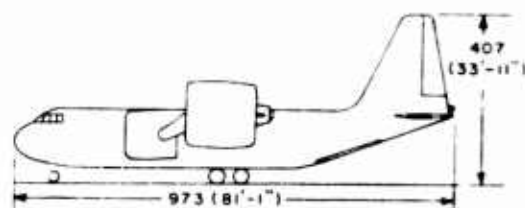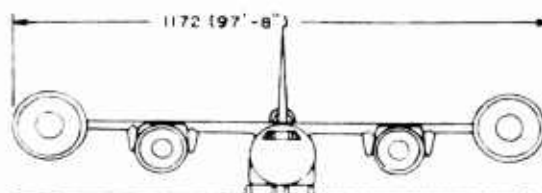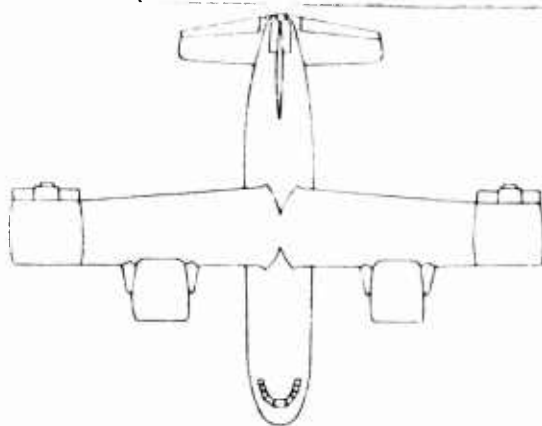

AVAILABILITY

PROCUREMENT

AVAILABILITY			PROCUREMENT			
ACTIVE	RESERVE	TOTAL				

STATUS

FEATURES

1. Vertical take off and landing in horizontal attitude.
2. Can make overload short take off for increased radius, range, and payload.
3. High speed in excess of 500 mph. and hovering capability of 70 minutes.
4. Superior stability during hovering and transition due to ducted propellers.
5. Good handling and maintenance characteristics.
6. Proven reaction control during vertical take off and landing.
7. Manual pilot control without automatic stabilization or control during vertical take off and landing.
8. Maximum fuel load--wings plus fuselage (32,670 pounds)

CARGO

1. Max load (16,720 pounds)
2. Clear space.
35' x 10' 8" x 8'

UNCLASSIFIED

UNCLASSIFIED